

Fact Sheet

BIZERBA

iL Special 2000FF/MP

Extra flat and high performance: Load receptor iL Special 2000 FF/MP is ideally suitable for the food and pharmaceutical industries. The version with folding frame particularly stands out in terms of hygiene.



More information
High performance with a wide range of solutions and options.

Specifications	Facts	Details
Weighing range	600-1,500 kg	Interval: 200-500 g
Load cell	Br or HLC load cells	
Dimensions load platter	1,250x1,500 mm	
Ramp length	approx. 500 mm	
Materials	Stainless steel	Load platter screwed to load frame
Load platter height	60 mm	
Mounting method	Free-standing	With lifting frame and ramp
IP rating	IP67	Load cells Cable junction box
Explosion-proof version	Zone 1/21 Zone 2/22	Load cells in Ex ib version for Ex zone 1/21 Additional plate for Ex zone 2/22
Ambient temperature	-10 °C to +40 °C -50 °C to +85 °C	Operation Storage
Permissible loads:	Max. safe load: 1,800 kg Wheel load: 400 kg Axle load: 800 kg	



Options	Facts	Details
Explosion-proof version	Load cells for zones 1/21 and 2/22	
Special dimensions	On request	
Second ramp		

Info graphics


Symbols





Dimensional drawings

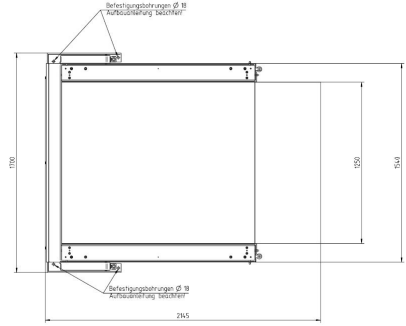


Aufklappvorrichtung in Reinigungsstellung

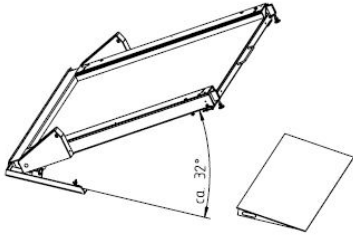


Aufklappvorrichtung in Gebrauchsstellung

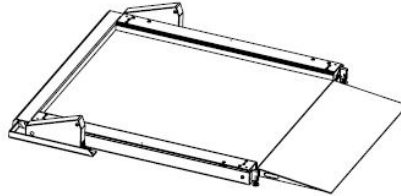

Optional second ramp

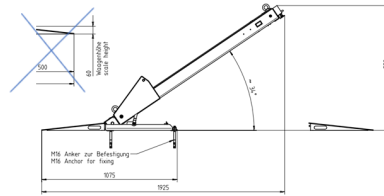

Lifted up for cleaning

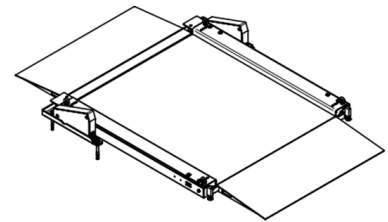

Bizerba SE & Co. KG
 Wilhelm-Kraut-Straße 65
 72336 Balingen

T +49 7433 12-0
 fax: +49 7433 12-2696
 marketing@bizerba.com

www.bizerba.com