

# Fact Sheet

## iS65 G3

**BIZERBA**

*The powerful industrial PC iS65 is designed for continuous operation in demanding industrial environments. It reliably supports you in terms of machine control or as an operating unit in intralogistics.*



**More information**  
High performance  
with a wide range of  
solutions and options.

Specifications	Facts	Details
<b>Housing</b>	Stainless steel	V2A back panel
<b>IP rating</b>	IP65 Rubber cable bushing to protect all interfaces	Dust and water proof
<b>Ambient temperature</b>	0 °C to +40 °C	Operation
<b>Display</b>	15.6" LCD TFT display	Resolution: 1,366 x 768 px
<b>Touch screen</b>	Projected Capacitive Touch	Use in moderate industrial environments
<b>Processor</b>	Intel Atom E3950	1.6 GHz; Quad Core (burst frequency up to 2.0 GHz)
<b>Working memory</b>	8 GB	DDR3 RAM
<b>Data storage</b>	128 GB	SSD Solid-State-Drive
<b>Operating system</b>	Windows 10 IoT Enterprise LTSC	The Microsoft license terms apply: <a href="https://www.microsoft.com/en-us/Useterms/Retail/Windows/10/UseTerms_Retail_Windows_10_English.htm">https://www.microsoft.com/en-us/Useterms/Retail/Windows/10/UseTerms_Retail_Windows_10_English.htm</a>
<b>Interfaces</b>	4 x USB 2 x Ethernet 1 x serial port	USB 3.0 RJ45, 10/100/1,000 Mbit RS232 (D-sub 9 pin), 5V voltage supply for connected external scanner via selector Please note: via the rubber bushings (IP65) max. 5 interface cables can be routed outwards.
<b>WLAN</b>	WLAN internal wireless module	IEEE 802.11 a/b/g/n/ac externe Antennen für bestmöglichen Empfang
<b>Mounting system</b>	VESA 75	Mounting bracket
<b>Mains supply</b>	DC IN 24 V DC	Wide range 19 - 29 V DC Power consumption 1.7 A
<b>Options</b>	<b>Facts</b>	<b>Details</b>
<b>Device holder</b>	Table stand Column Wall retaining unit	
<b>Weighing technology</b>	not integrated, possible via WM-T	

---

## Info graphics



---


## Symbols



IP65 protection





64 bit



Solid State Drive

---

## Dimensional drawings

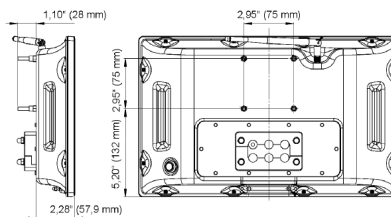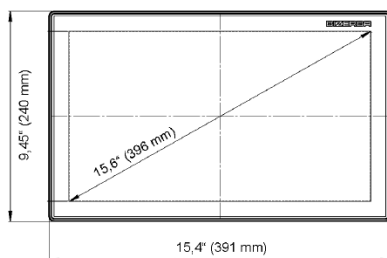

---

**Bizerba SE & Co. KG**  
Wilhelm-Kraut-Straße 65  
72336 Balingen

T +49 7433 12-0  
fax: +49 7433 12-2696  
marketing@bizerba.com

[www.bizerba.com](http://www.bizerba.com)